

# Installation Guide for Lantronix XPort03/04 and XPort05 Firmware

## Introduction

This document will go through the steps required to update the LANTRONIX XPORT-03/-04/-05.

**\*\*NOTE: XPORT03/04 is only compatible with CIC949-1V1.1 and XPORT 05 is only compatible with CIC949-2V1.8.\*\***

## Equipment Requirements

- Power supply with –LAN option hardware installed.
- LAN Cable
- Lantronix Server Configuration Utility version 4.2.0.4 or higher.

Software found here: <http://www.lantronix.com/device-networking/utilities-tools/device-installer.html>

## Setup

1. Turn ON Power Supply.
2. Connect the power supply LAN to computer or to the Network.
3. Open LANTRONIX device installer program. Figure 1 will appear. Identify the XPORT, that required configuration, from the listed of items by its Hardware Address.
4. Highlight the item that needs update. **\*\*Note if the file is XPort03/04 or XPort05.\*\***

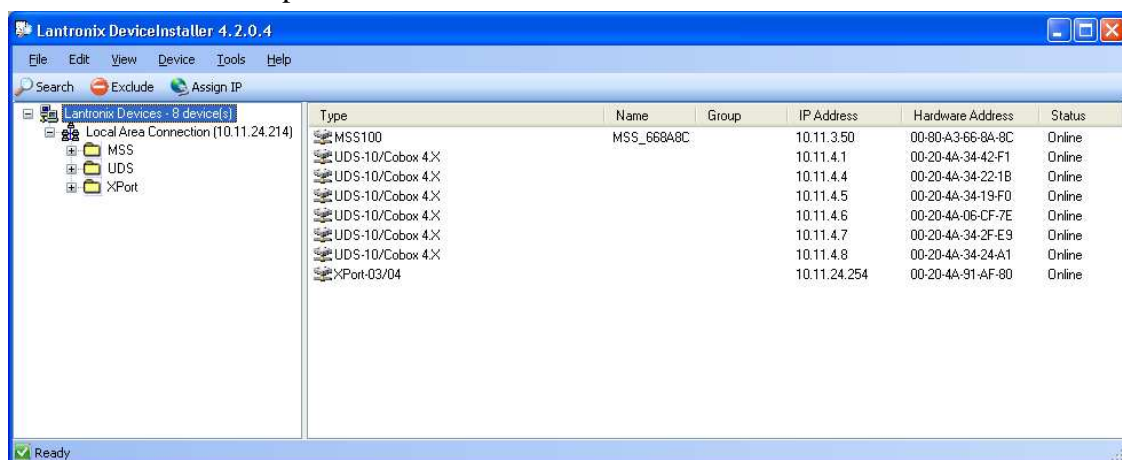


Figure 1: Device installer screen

## Configuration

5. While the item is highlighted, select upgrade from the top menu. Figure 2 will appear.

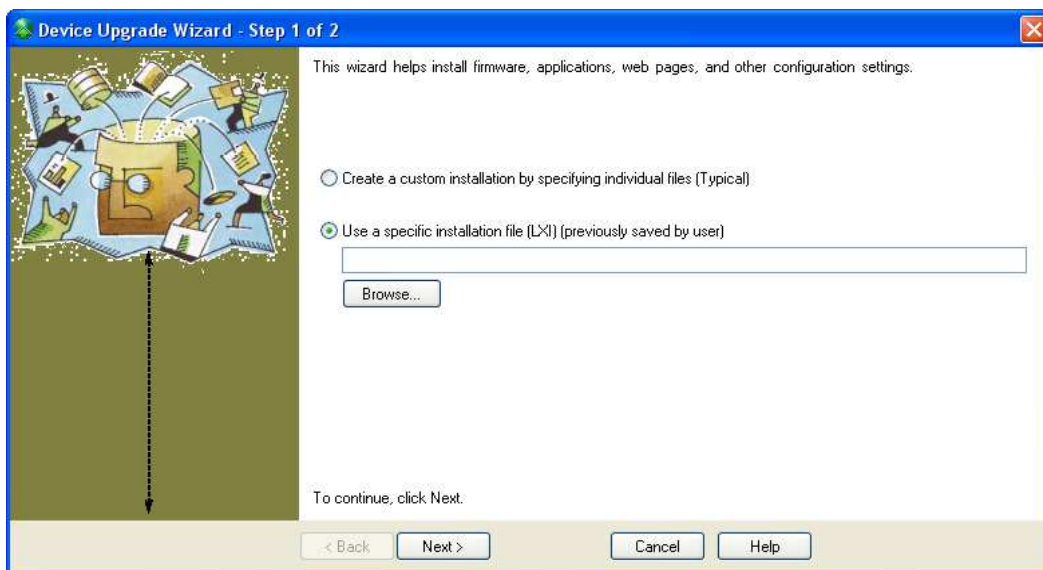
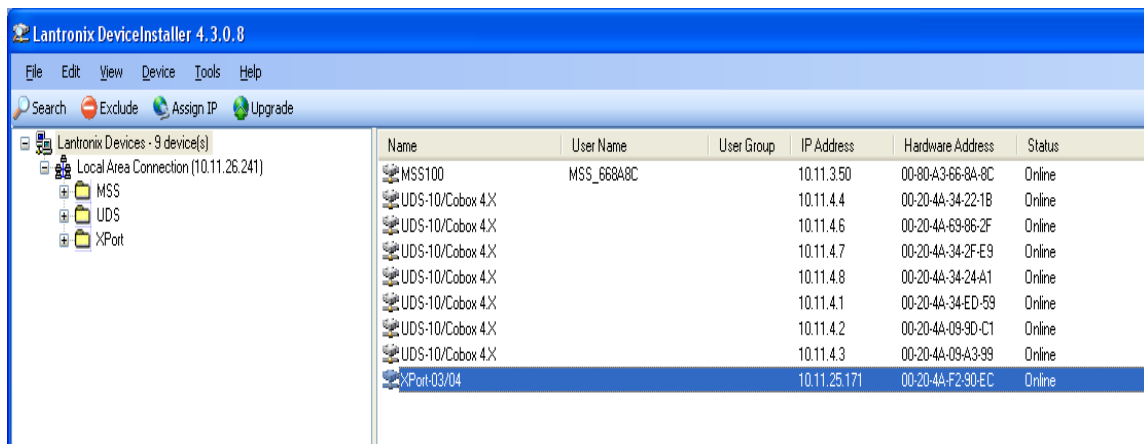


Figure 2: Device Upgrade Screen

6. Select “Use specific installation file” and click “Browse”.

7. If upgrading XPort 03/04 navigate to zip file downloaded “cic949-1r1.1.zip” and select the file “CIC949-1rev1.1.lxi”.

If upgrading XPort05 navigate to the zip folder “CIC949-2V1\_8.zip” and select the file “CIC949-2V1.8.lxi”.

These are the current file revisions and could change with upgrade. Click Next. Figure 3 will appear and the update sequence will take place.

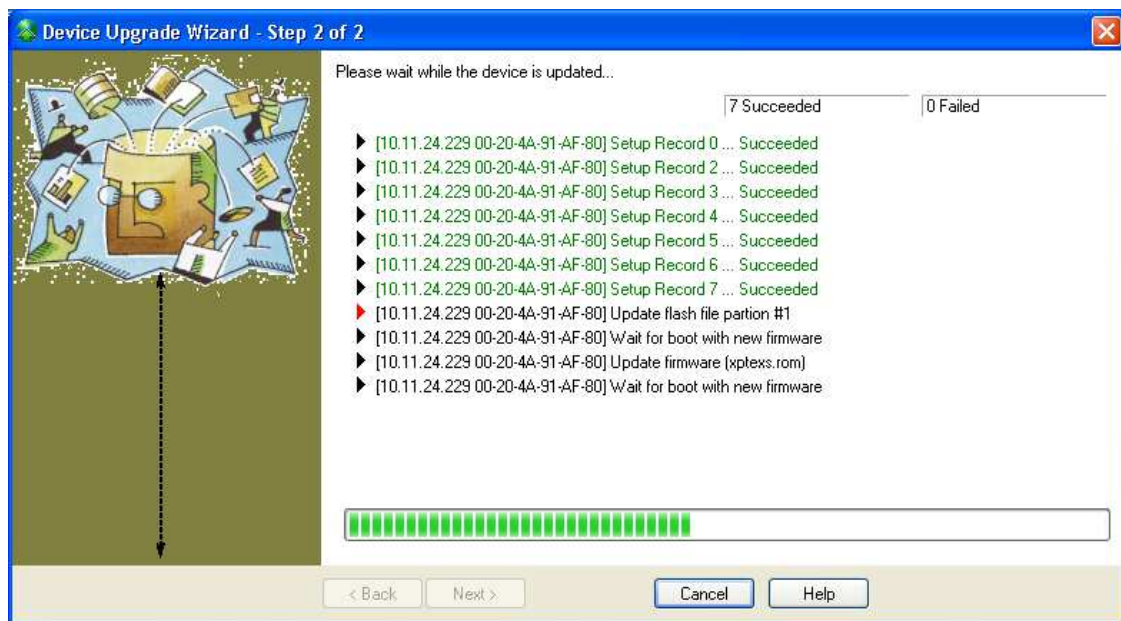


Figure 3: Update Sequence screen

Verify all the download sequences show as “Succeeded”.

Update complete.

California Instruments Product Support:

On-Line Request:

[www.programmablepower.com/support/support\\_CallInst.htm](http://www.programmablepower.com/support/support_CallInst.htm)

Direct: [ci.ppd@ametek.com](mailto:ci.ppd@ametek.com)

Phone: 800-733-5427