

LANTRONIX XPORT03/04 AND XPORT05 UPDATE PROCEDURE

1 Introduction

This document will go through the steps required to update the LANTRONIX XPORT-03/-04/-05.

****NOTE: XPORT03/04 is only compatible with CIC949-1V1.1 and XPORT 05 is only compatible with CIC949-2V1.2.****

2 Equipment Requirements

- Power supply with –LAN option hardware installed.
- LAN Cable
- Lantronix Server Configuration Utility version 4.2.0.4 or higher.

Software found here: <http://www.lantronix.com/device-networking/utilities-tools/device-installer.html>

3 Setup

- 3.1 Turn ON Power Supply.
- 3.2 Connect the power supply LAN to computer or to the Network.
- 3.3 Open LANTRONIX device installer program. Figure 1 will appear. Identify the XPORT, that required configuration, from the listed of items by its Hardware Address.
- 3.4 Highlight the item that needs update. ****Note if the file is XPort03/04 or XPort05.****

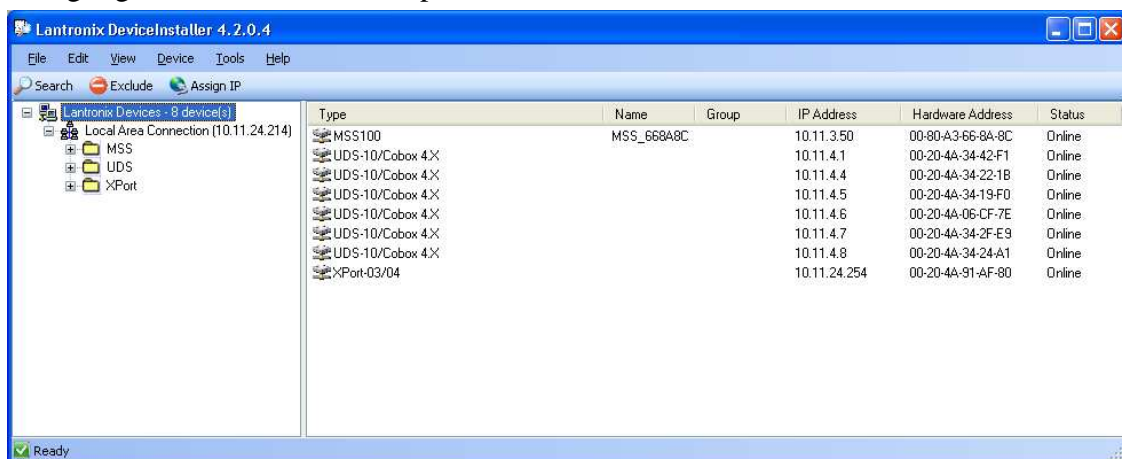


Figure 1: Device installer screen

4 Configuration

4.1 While the item is highlighted, select upgrade from the top menu. Figure 2 will appear.

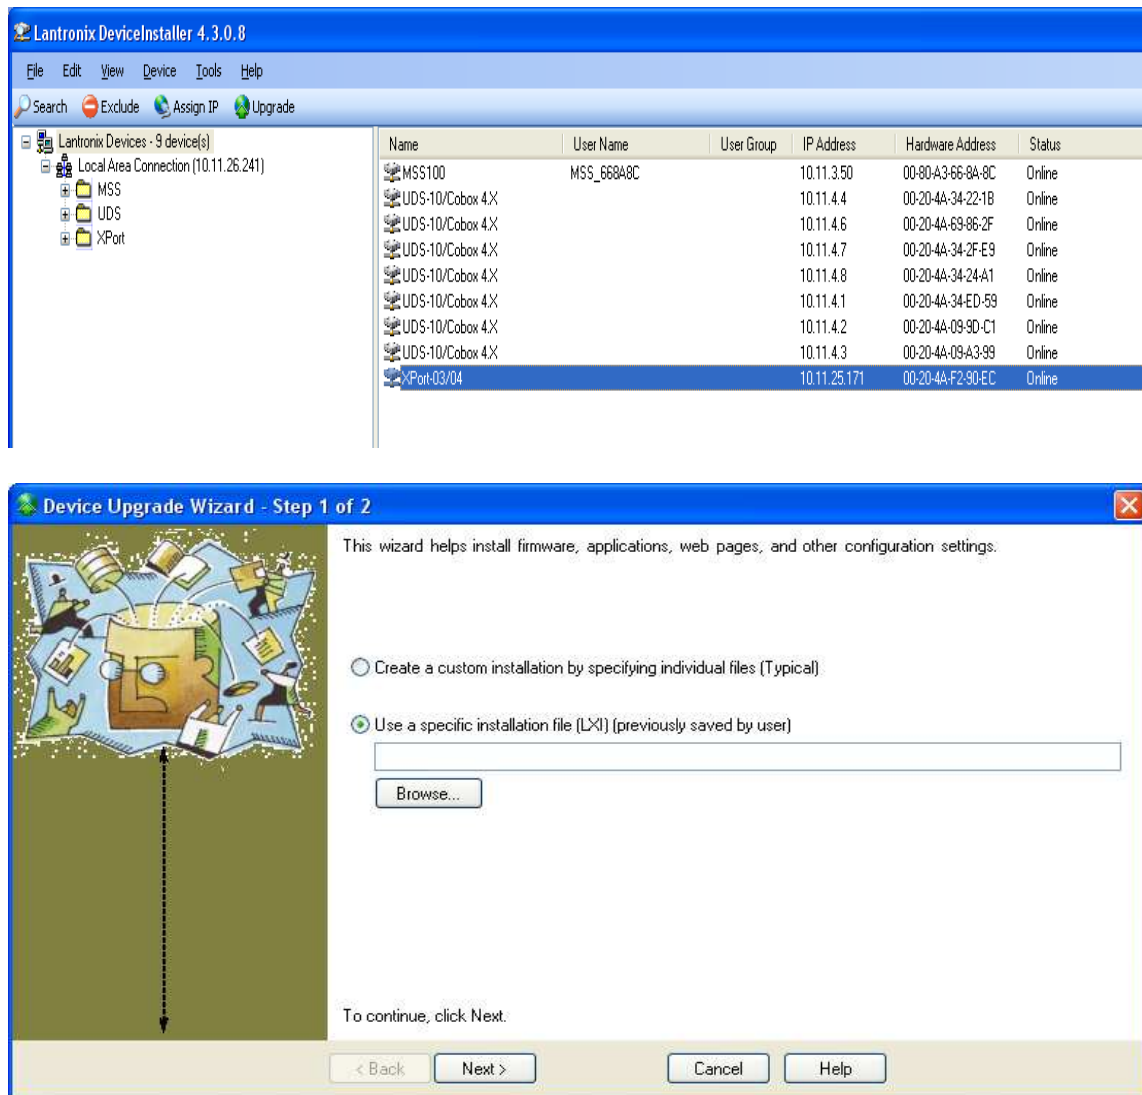


Figure 2: Device Upgrade Screen

4.2 Select "Use specific installation file" and click "Browse".

- 4.3 If upgrading XPort 03/04 navigate to zip file downloaded “cic949-1r1.1.zip” and select the file “CIC949-1rev1.1.lxi”.

If upgrading XPort05 navigate to the zip folder “CIC949-2V1.2.zip” and select the file “CIC949-2ver1.2.lxi”.

These are the current file revisions and could change with upgrade. Click Next. Figure 3 will appear and the update sequence will take place.

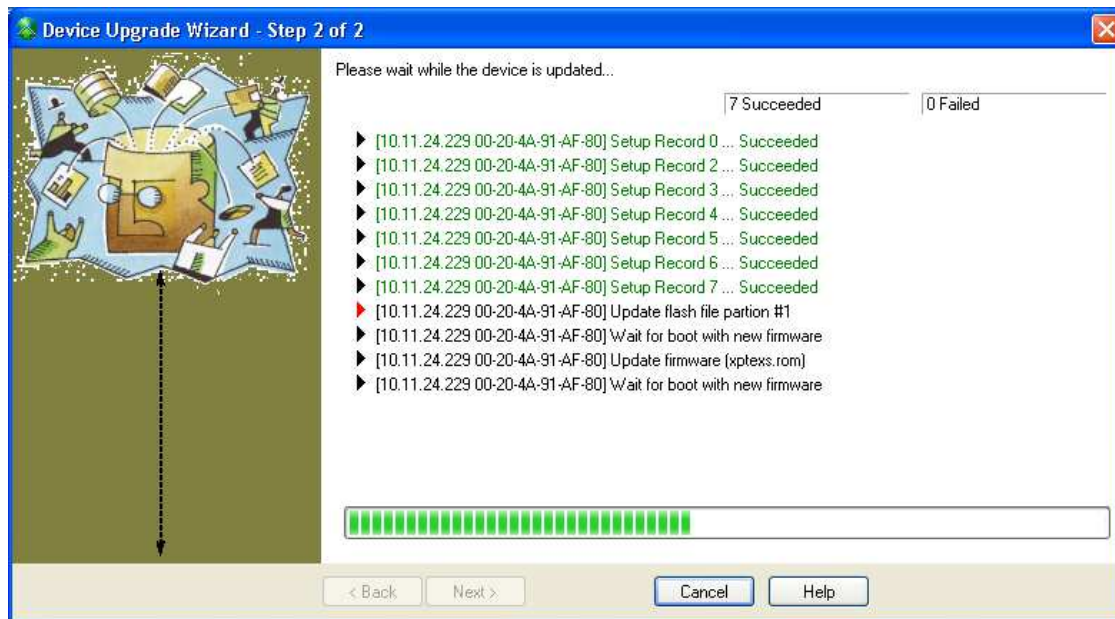


Figure 3: Update Sequence screen

Verify all the download sequences show as “Succeeded”.

Update complete.